



ILUMIPOD INGROUND 36 IP OPTIC 30 WW
Item Number: 11036008

ILUMINARC®

SPECIFICATION



- 1, 3, 4, or 7 channel DMX-512 LED in-ground wash light
- Color temp mixing with or without DMX controller (from 2,800 K ~ 7,000 K) via SpectraWhite technology
- IP67
- ADA compliant skid resistant, drive over rated glass lens cover
- High power 1 W (350 mA) LEDs

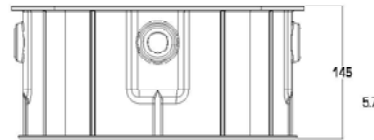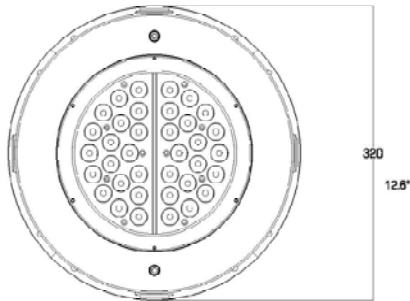

Physical

Diameter: 12.6 in (320 mm)
Height: 5.7 in (145 mm)
Weight: 17.6 lbs (8 kg)

Optics

Light source: 36 x 1 W 350 mA (12 cool white, 24 warm white) LEDs
Minimum LED lifetime: 50,000 hrs based on manufacturer's specifications

JOB INFORMATION Type: _____

Job Name: _____

Cat. Number: _____


Notes:

5200 NW 108th Ave Sunrise FL, 33351
877-932-3680
WWW.ILUMINARC.COM

ILUMIPOD INGROUND 36 IP OPTIC 30 VW

Item Number: 11036008

ILUMINARC®

Construction	Color: Stainless steel silver Housing: Cast aluminum and stainless steel with integrated cooling enhancement Lens cover: Impact resistant glass (drive over rated) Protection rating: IP67
Control	Operating modes: Determined by personality chosen on the Ilumicode Control protocol: USITT DMX 512 Addresser: Ilumicode (item# 44444001)
Installation	Orientation: Any Minimum distance to illuminated surface: 4 in (92 mm)
Connections	All power and data connections to be done through stainless steel gland nut provided with the fixture
Electrical	AC power: 100 ~ 240 V, 50/60 Hz Power supply: Internal, auto-ranging, multi-voltage
Power and Current	120 V, 60 Hz: 38 W, .6 A operating, .1 A inrush 230 V, 50 Hz: 40 W, .3 A operating, .3 A inrush
Thermal	Cooling: Convection via integrated cooling enhancement Maximum ambient temperature (Ta max): 40° C (104° F)
Approvals	 <p>CONFORMS TO UL STD. 1573 CERTIFIED TO CSA STD. C22.2 No. 166 3144482</p>
Included items	ILUMIPOD INGROUND 36 IP Optic VW Cement installation sleeve Warranty Card User Manual

Specification subject to change without notice

JOB INFORMATION Type: _____

Job Name: _____

Cat. Number: _____


Notes:

ILUMIPOD INGROUND 36 IP OPTIC 30 VW


Item Number: 11036008

ILUMINARC®

Filename: Ilumipod Inground 36 IP Optic 30 VW 100% ALL
 Manufacturer: ILUMINARC
 Luminaire: Ilumipod Inground 36 IP Optic 30 VW
 Lamp: 24 Warm White, 12 Cool White
 Lamp Output: 1 lamp(s), rated Lumens/lamp: 3000
 Max Candela: 3,534.3 at Horizontal: 0, Vertical: 0
 Input Wattage: 46.5
 Luminous Opening: Point
 Test: 2009 ALL
 Test Lab: Iluminarc R & D Optics Laboratory
 Photometry : Type B
 CIE Class: Direct
 Cutoff Class: Full Cutoff
 Filename: Ilumipod Inground 36 IP Optic 30 VW 100% ALL

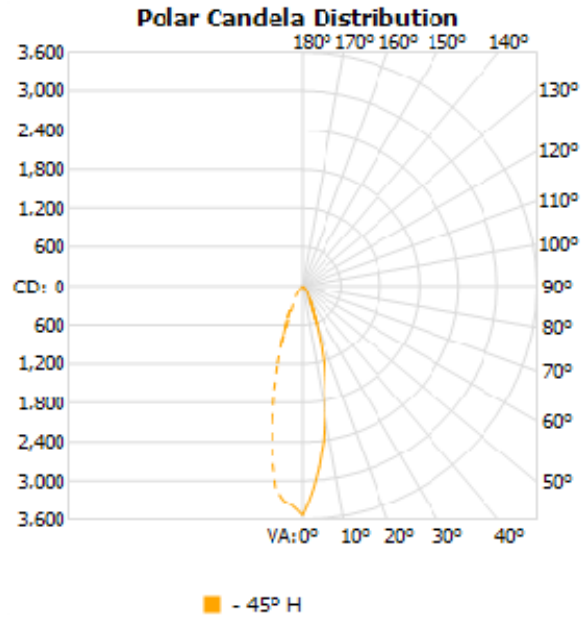

Flood Summary				
	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%):	27.3%	819.3	52.2	52.7
Beam (50%):	13.8%	413.5	26.5	26.6
Total:	32.8%	985.2		

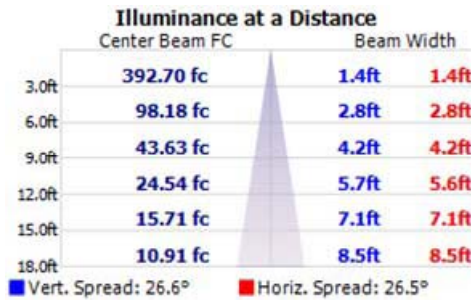

Photometrics Pro 1.3.2 copyright 2003-2008 by jSolutions, Inc.
 Reported data calculated from manufacturer's data file, based on IES recommended methods.

JOB INFORMATION Type: _____

Job Name: _____

Cat. Number: _____

Notes: