



LOGIC™ 4x36
Item Number: 34x36001

ILUMINARC®

SPECIFICATION

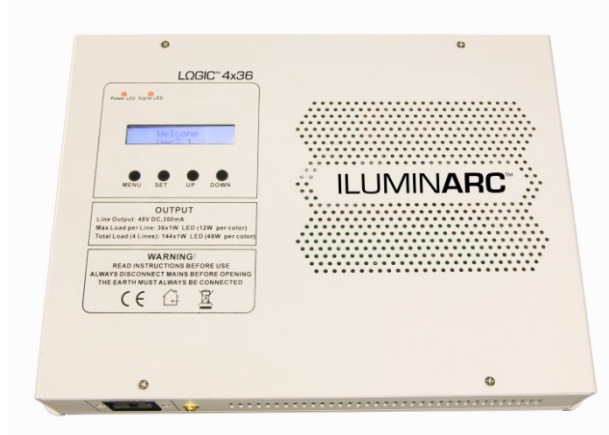

- 1, 2, 3, 4, 6, 9, 12 or 15-channel DMX control
- RGB or SpectraWhite mixing with or without outboard DMX controller via integrated command LCD display
- White effects mixing with or without DMX controller
- Recall custom programs via master/slave or DMX
- Upload software over RS-232 connection
- Schedule playback with time clock functions
- Master/slave over RJ-45 connections

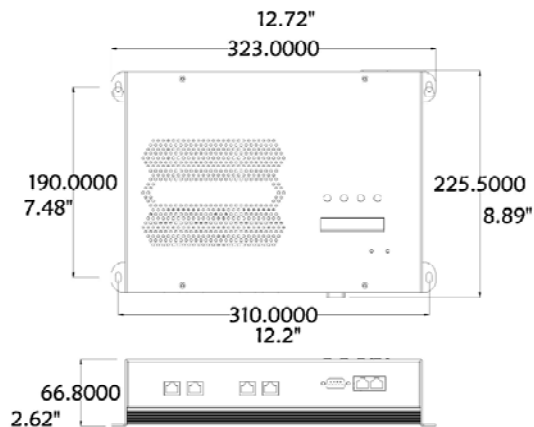

Physical

Length: 9.9 in (225 mm)
Width: 12.7 in (323 mm)
Height: 2.6 in (67 mm)
Weight: 5.6 lbs (2.54 kg)

5200 NW 108th Ave Sunrise FL, 33351
877-932-3680
WWW.ILUMINARC.COM

JOB INFORMATION Type: _____

Job Name: _____

Cat. Number: _____

Notes:

LOGIC™ 4x36

Item Number: 34x36001

ILUMINARC®

Construction	Color: Beige powder coat Housing: Steel Protection rating: IP20
Control	Operating modes: RGB 1-channel: RGB, dimmer (no individual RGB adjustments) 3-channel: RGB control (individual RGB adjustments) 4-channel: RGB control, dimmer 6-channel: RGB control, dimmer, color macro, strobe 9-channel: RGB control, dimmer, color macro, strobe, auto + custom, auto speed, Zone selection White 1-channel: White dimmer 2-channel: White control (warm + cool) 2-channel: White macro, dimmer 3-channel: White control (warm + cool), dimmer 4-channel: White control (warm + cool), macro, dimmer, Stand alone: Color mixing with or without DMX controller via integrated command LCD display Recall custom programs via master/slave or DMX Control protocol: USITT DMX 512
Installation	Orientation: Any
Connections	Power cable entry: IES inlet Power cable: 60in (1524mm) Data cable entry: RJ-45 Data cable: Data in: RJ-45 to 3 pin male, data out: RJ-45 to 3 pin female
Electrical	AC power: 100 ~ 240 V, 50/60 Hz Power supply: Internal, auto-ranging, multi-voltage
Power and current	120 V, 60 Hz: 180 W, 1.5A operating, .4 A inrush 230 V, 50 Hz: 161 W, .7 A operating, .6 A inrush
Thermal	Cooling: Convection via integrated cooling enhancement Maximum ambient temperature (Ta max): 40° C (104° F)
Approvals	 <p>CONFORMS TO UL STD. 1573 CERTIFIED TO CSA STD. C22.2 No. 166 3144482</p>
Included items	1 x LOGIC™ 4x36 1 x RJ-45 to 3 pin DMX male adapter (input) 1 x RJ-45 to 3 pin DMX female adapter (output) 4 x RJ-45 barrel connector 1 x IEC power cable with plug: 60in (1524mm) Warranty Card User QSG

Specifications subject to change without notice

5200 NW 108th Ave Sunrise FL, 33351
877-932-3680
WWW.ILUMINARC.COM

JOB INFORMATION Type: _____

Job Name: _____

Cat. Number: _____

Notes: