



Ilumiline 21 IP Optic 25 x 6 VW
 Item Number: 12021005

ILUMINARC®

SPECIFICATION



- Variable white (2,800 K ~ 7,000 K) DMX-512 LED wash
- IP67
- High power 1 W (350 mA) LEDs

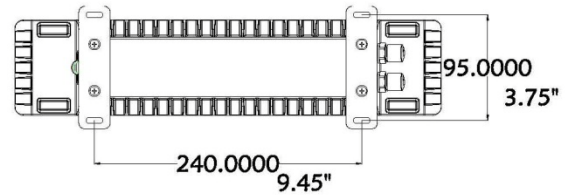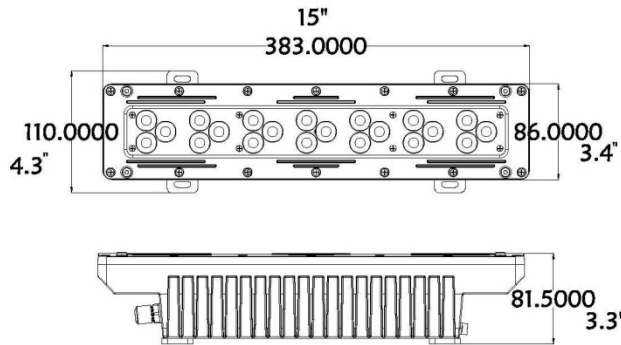

Physical

Length: 15 in (383 mm)
 Width: 4.3 in (110 mm)
 Height: 3.3 in (82 mm)
 Weight: 6.6 lbs (3 kg)

Optics

Light source: 21 x 1 W 350 mA (7 cool white, 14 warm white) LEDs
 Minimum LED lifetime: 50,000 hrs based on manufacturer's specifications

JOB INFORMATION Type: _____

Job Name: _____

Cat. Number: _____


Notes:

Ilumiline 21 IP Optic 25 x 6 VW


Item Number: 12021005

ILUMINARC®

Filename: Ilumiline 21 IP Optic 25x6 VW 100% ALL
 Manufacturer: ILUMINARC
 Luminaire: Ilumiline 21 IP Optic 25x6 VW
 Lamp: 14 Warm White, 7 Cool White
 Lamp Output: 1 lamp(s), rated Lumens/lamp: 1400
 Max Candela: 2,587.2 at Horizontal: 320, Vertical: 5
 Input Wattage: 29.9
 Luminous Opening: Point
 Test: 2009 ALL
 Test Lab: Iluminarc R & D Optics Laboratory
 Photometry : Type B
 CIE Class: Direct
 Cutoff Class: Full Cutoff
 Filename: Ilumiline 21 IP Optic 25x6 VW 100% ALL

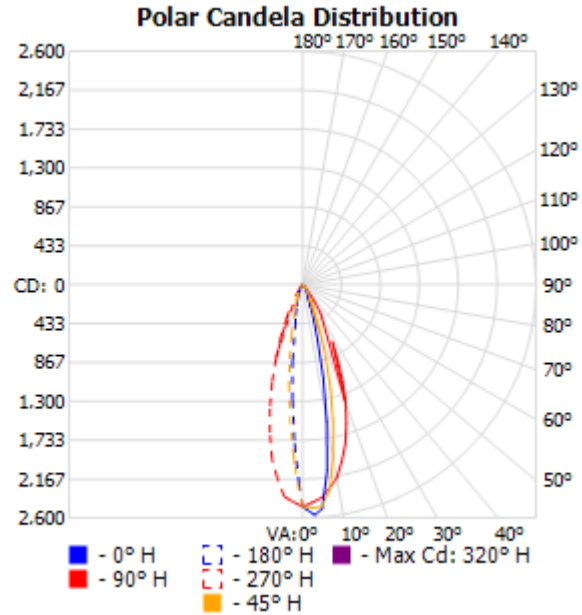

Flood Summary			
	Efficiency	Lumens	Horizontal Spread Vertical Spread
Field (10%):	36.7%	513.8	64 34.6
Beam (50%):	19.9%	278.0	38.2 16.2
Total:	46.4%	650.1	

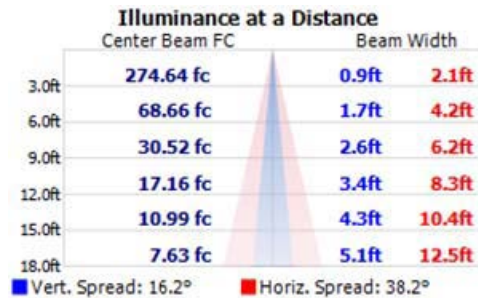

Photometrics Pro 1.3.2 copyright 2003-2008 by jSolutions, Inc.
 Reported data calculated from manufacturer's data file, based on IES recommended methods.

JOB INFORMATION Type: _____

Job Name: _____

Cat. Number: _____

Notes: