



Ilumiline 21 IP Optic 30 VW  
 Item Number: 12021004

ILUMINARC®

## SPECIFICATION



- Variable white (2,800 K ~ 7,000 K) DMX-512 LED wash
- IP67
- High power 1 W (350 mA) LEDs

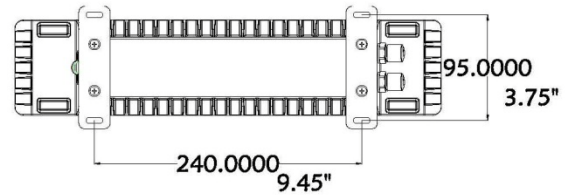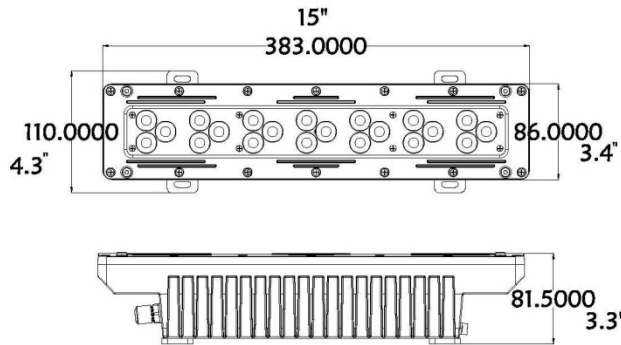

### Physical

Length: 15 in (383 mm)  
 Width: 4.3 in (110 mm)  
 Height: 3.3 in (82 mm)  
 Weight: 6.6 lbs (3 kg)

### Optics

Light source: 21 x 1 W 350 mA (7 cool white, 14 warm white) LEDs  
 Minimum LED lifetime: 50,000 hrs based on manufacturer's specifications

*JOB INFORMATION* Type: \_\_\_\_\_

Job Name: \_\_\_\_\_

Cat. Number: \_\_\_\_\_

Notes:




# Ilumiline 21 IP Optic 30 VW


## Item Number: 12021004

ILUMINARC®

**Filename: Ilumiline 21 IP Optic 30 VW 100% ALL**  
 Manufacturer: ILUMINARC  
 Luminaire: Ilumiline 21 IP Optic 30 VW  
 Lamp: 14 Warm White, 7 Cool White  
 Lamp Output: 1 lamp(s), rated Lumens/lamp: 1400  
 Max Candela: 2,036.6 at Horizontal: 0, Vertical: 0  
 Input Wattage: 28.9  
 Luminous Opening: Point  
 Test: 2009 ALL  
 Test Lab: Iluminarc R & D Optics Laboratory  
 Photometry : Type B  
 CIE Class: Direct  
 Cutoff Class: Full Cutoff  
**Filename: Ilumiline 21 IP Optic 30 VW 100% ALL**

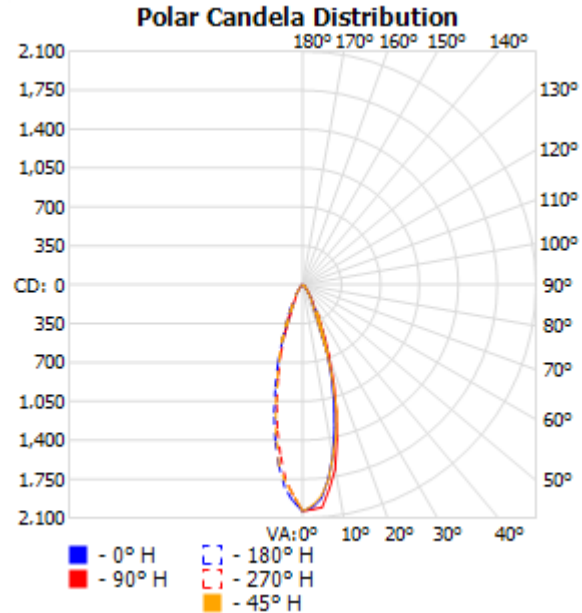

Flood Summary				
	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%):	41%	574.3	56.7	56.8
Beam (50%):	22.1%	309.1	29.8	30
Total:	48.8%	682.7		

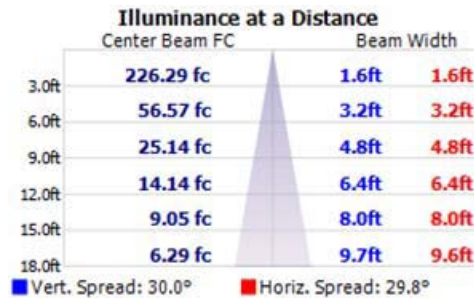

Photometrics Pro 1.3.2 copyright 2003-2008 by jSolutions, Inc.  
 Reported data calculated from manufacturer's data file, based on IES recommended methods.

*JOB INFORMATION* Type: \_\_\_\_\_

Job Name: \_\_\_\_\_

Cat. Number: \_\_\_\_\_

Notes: