


Illumipod LQgic™ 3 Optic 30 RGB
Item Number: 21003002

ILUMINARC®

SPECIFICATION



- Compatible with LQgic™ system devices
- Light weight and durable construction
- Plenum rated cable
- High power 1 W (350 mA) LEDs
- Direct replacement for MR16

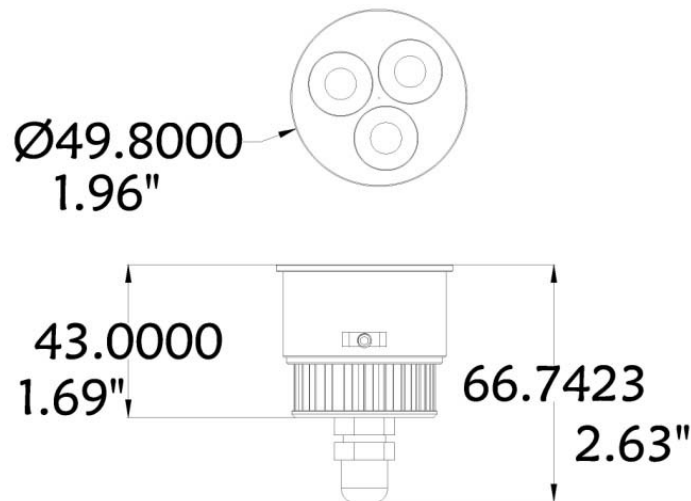

Physical

Length: 2.6 in (67 mm)
Diameter: 1.96 in (50 mm)
Height: 2.6 in (67 mm)
Weight: .4 lbs (.17 kg)

Optics

Light source: 3 x 1 W 350 mA (1 Red, 1 Green, 1 Blue) LEDs
Minimum LED lifetime: 50,000 hrs based on manufacturer's specifications

JOB INFORMATION Type: _____

Job Name: _____


Cat. Number: _____

Notes:

Illumipod LQgic™ 3 Optic 30 RGB

Item Number: 21003002

ILUMINARC®

Construction	Color: Silver Housing: Cast aluminum Protection rating: IP20
Control	Determined by software installed into LQgic™ driver that has been selected
Installation	Orientation: Any Minimum distance to illuminated surface: 4 in (92 mm)
Connections	Power and data cable entry: Belden 1585A plenum rated with RJ45 connector 79 in (2,000 mm)
Electrical	Power supply: LQgic™ driver
Input current	350 mA @ 48 V
Power consumption	7.2 W
Thermal	Cooling: Convection Maximum ambient temperature (Ta max): 40° C (104° F)
Approvals	 <p>CONFORMS TO UL STD. 1573 CERTIFIED TO CSA STD. C22.2 No. 166 3144482</p>
Included items	Illumipod LQgic™ 3 Optic RGB Warranty Card User Manual
Accessories	Trim ring: Brushed aluminum (66666001) Trim ring: White (66666002)

Specification subject to change without notice

JOB INFORMATION Type: _____

Job Name: _____

Cat. Number: _____


Notes:

Ilumipod LQgic™ 3 Optic 30 RGB


Item Number: 21003002

ILUMINARC®

Filename: Ilumipod Logic 3 Optic 15 RGB-
RGB_IESNA2002
 Manufacturer: ILUMINARC
 Luminaire: ILUMIPOD LOGIC 3 OPTIC RGB 15 DEGREE
 Luminaire Cat: 21003001
 Lamp: 1 RED,1 GREEN,1 BLUE
 Lamp Output: 1 lamp(s), rated Lumens/lamp: 110
 Max Candela: 1,346.9 at Horizontal: 0, Vertical: 0
 Input Wattage: 7.2
 Luminous Opening: Point
 Test: 2009430RGB
 Test Lab: Iluminarc R&D Optics Laboratory
 Photometry : Type B
 CIE Class: Direct
 Cutoff Class: Full Cutoff

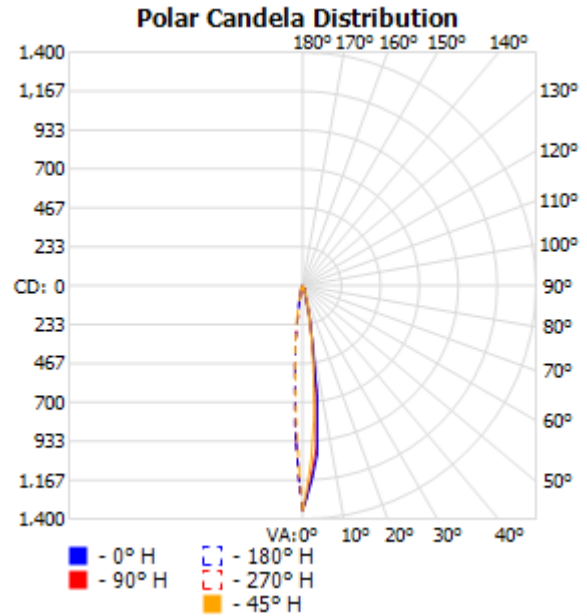

Flood Summary				
	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%):	53.9%	59.3	23.5	24.1
Beam (50%):	22.9%	25.2	11.2	11.5
Total:	78.4%	86.2		

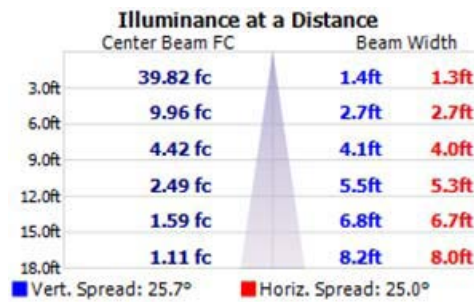

Photometrics Pro 1.3.2 copyright 2003-2008 by jSolutions, Inc.
 Reported data calculated from manufacturer's data file, based on IES recommended methods.

JOB INFORMATION Type: _____

Job Name: _____

Cat. Number: _____

Notes: